


FIBER ACCESS TERMINAL-24 CORES


Structure Diagram & Description

Fiber access termination box is able to hold up to 24 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

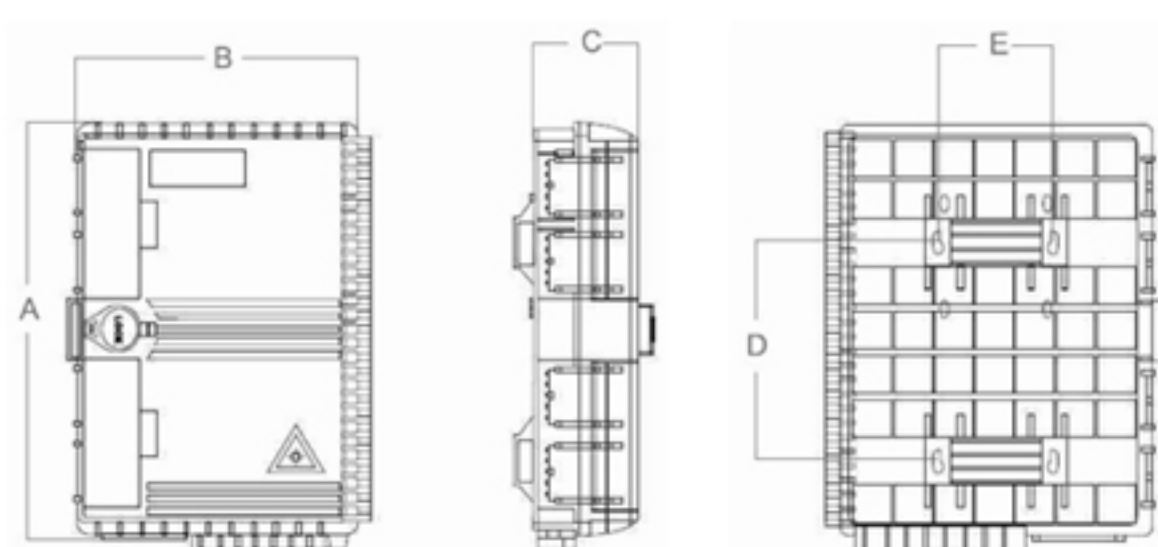

Pic 1 Box Size

Pic 2 Installation Size

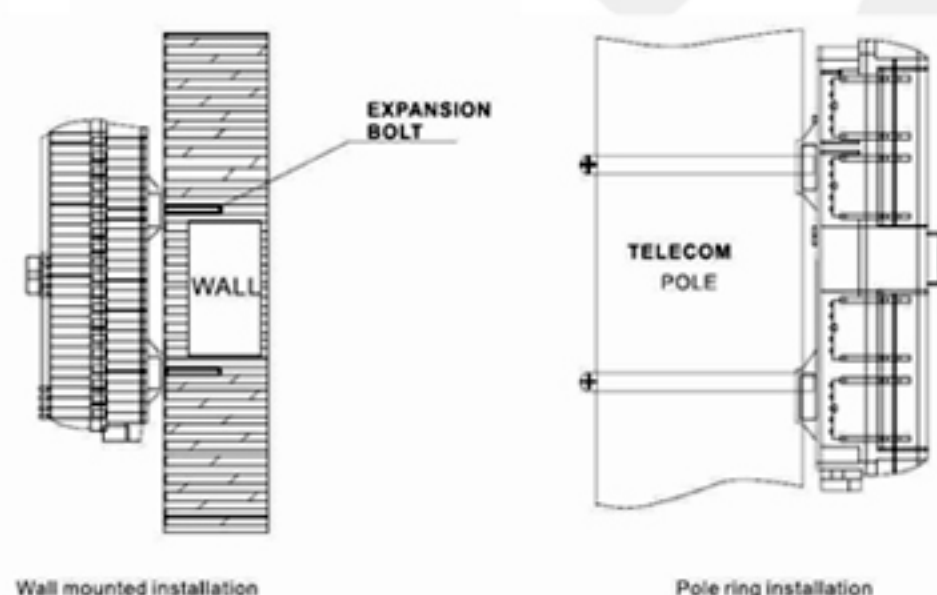

Wall mounted installation

Pole ring installation

Features:

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette & cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain & extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1*16 Splitter can be installed as an option.
- Efficient cable management.
- 24 ports cable entrance for drop cable.

Standard Accessories:

- Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

Optional Accessories:

- Pole ring, Extra lock and key

CONFIGURATION

Material	Size	Max Capacity	Installation Size	Weight	Color
PC + ABS	A*B*C (mm) 340*250*110	SC 24 Ports	PLC 1x16(SC) 154*82 D*E(mm)	1.5kg	Black