



## FIBER ACCESS TERMINAL-6 CORES

### Structure Diagram & Description

FAT-6A fiber access termination box is able to hold up to 6 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

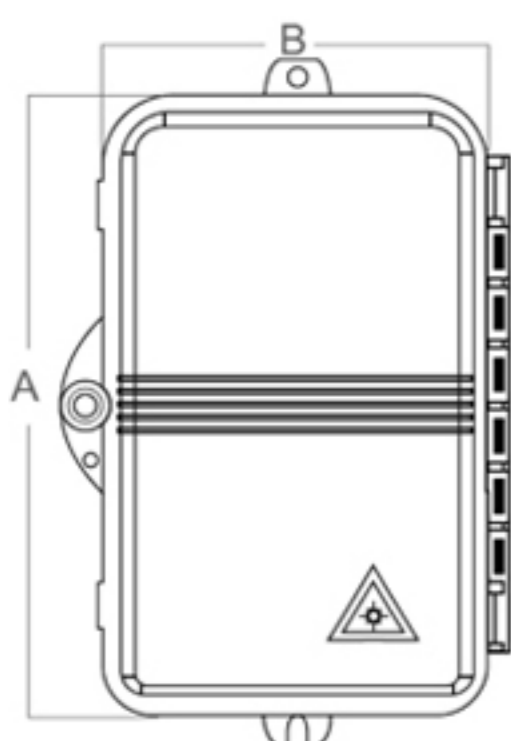

Pic 1 Box Size

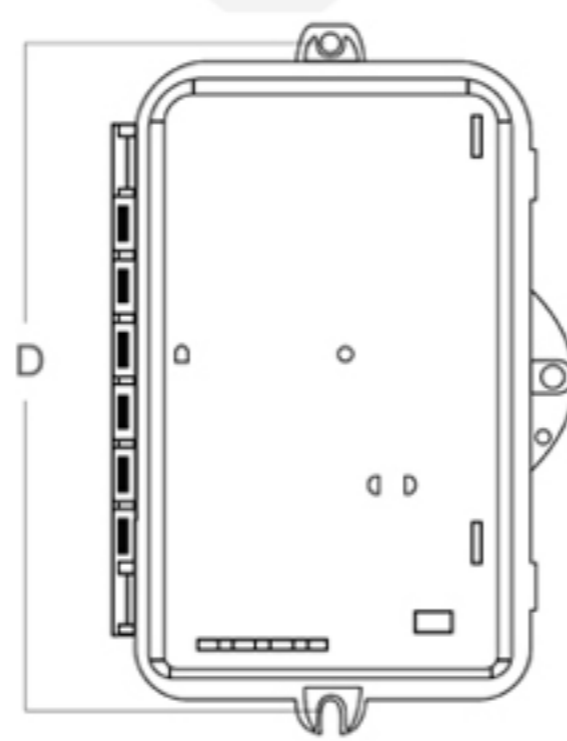

Pic 2 Installation Size

#### Features:

- Water-proof design with IP-65 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1\*4 Splitter can be installed as an option.
- Efficient cable management.
- 6 ports cable entrance for drop cable.

#### Standard Accessories:

- Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

#### Optional Accessories:

- Pole ring, Extra lock and key

### CONFIGURATION

Material	Size	Max Capacity			Installation Size	Weight	Color
PC + ABS	A*B*C (mm) 186*116*41	SC 6 Ports	LC 12 Ports	PLC 1x4(SC)	195 D (mm)	0.8kg	Light Gray