

ST ADAPTER

STRUCTURE DIAGRAM



DESCRIPTION

D-CONNECT ST adaptors have high precision alignment sleeves for reliability and better reconnectability. ST adaptors come with a ceramic sleeve for the singlemode and phosphor bronze sleeve for the multimode. The housing is available in single D or double D types.

FEATURES

- Complies with IEC 61754-20
- High precision alignment sleeve
- Low insertion loss and high reconnectability
- RoHS, REACH SvHC compliant
- Available in simplex only


APPLICATIONS

- Data processing networks
- Premises distribution



TECHNICAL DRAWING

ITEM

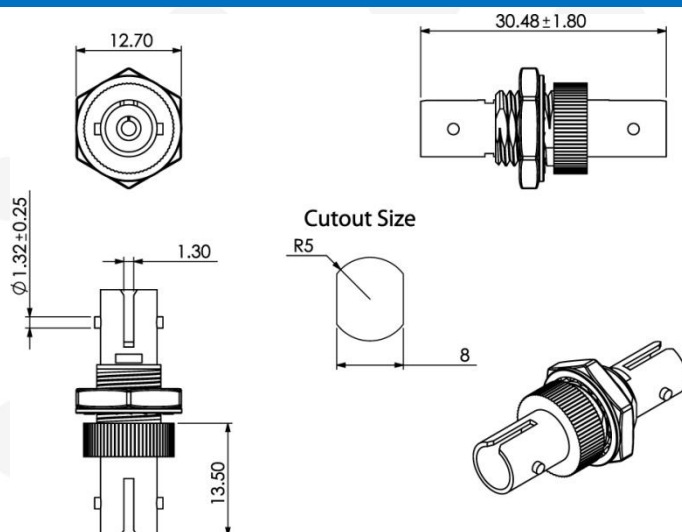


TECHNICAL SPECIFICATIONS

ITEM

	Ceramic	Phosphor Bronze	Conformance
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	500		IEC 61300-2-2
Receptacle Retention force	2N - 5.9N		IEC 61754-4
Operating temperature	-25 to +70, 12 cycles		IEC 61300-2-22

ORDERING INFORMATION

ADAPTERS

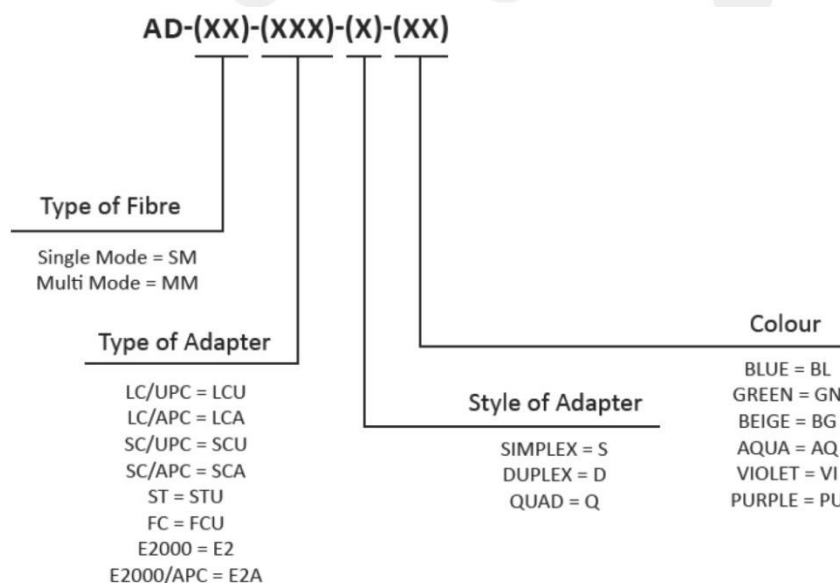

Part Number: AD-MM-SCU-D-BL