



FAT- 2A Fiber Access Terminal -2 Cores

STRUCTURE DIAGRAM & DESCRIPTION



FAT-2A fiber access termination box is able to hold upto 2 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

FEATURES

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1*2 Splitter can be installed as an option.
- Efficient cable management.
- 2 ports cable entrance for drop cable


CONFIGURATION

Material	Size	Max Capacity			Installation size	Weight	Color
		SC 2 Ports	LC 4PORT	PLC 1x2SC			
PC+ABS	A*B*C(mm) 168*102*32	SC 2 Ports	LC 4PORT	PLC 1x2SC	D*E(mm) 159*80	0.8kg	Light Gray



FAT-2A Fiber Access Terminal -2 Cores

TECHNICAL DRAWING

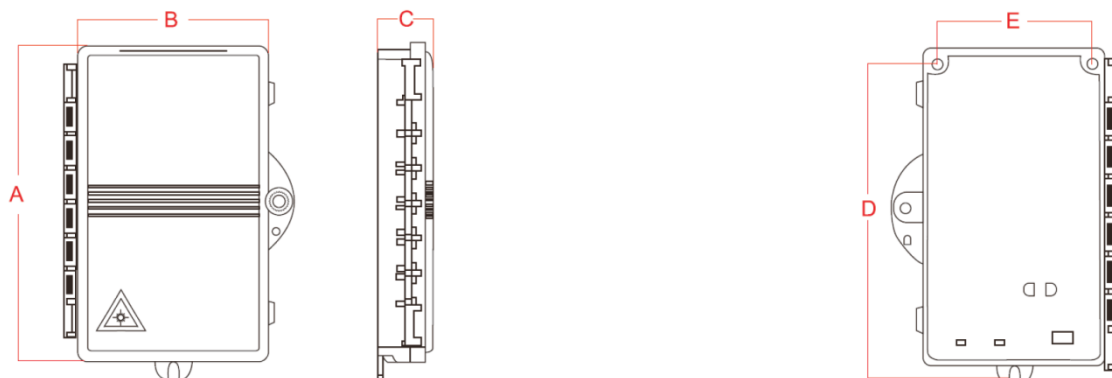

STANDARD ACCESSORIES

Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

OPTIONAL ACCESSORIES

Pole ring, Extra lock and key

ORDERING INFORMATION

DCFAT-T01-2A-YY

The last 2 digits "YY" represent the color.
White – 01; Black – 02; Light Gray – 14

Part Number	Description
DCFAT-T01-2A-01	FAT-2A Fiber Access Terminal, Type 1, White
DCFAT-T01-2A-02	FAT-2A Fiber Access Terminal, Type1, Black
DCFAT-T01-2A-14	FAT-2A Fiber Access Terminal, Type 1, Light Gray